


Pendant Luminaires | 220-240 V
9 topLED 46 W DC - 49 W AC | CRI 90

8684

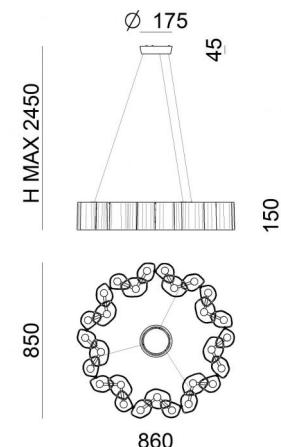

Technical data

Construction year	2019
Type	Pendant Luminaires
Installation position	Ceiling
Installation environment	Indoor
Light Source	LED
Circuit structure	topLED
Optics	Diffused
Light emission direction	downward and upward
Nominal power	46 W DC
Total Power	49 W
Source lumens	5170 lm
Nominal input voltage	220 - 240 V AC
Input voltage range	220 - 240 V AC
Frequency	60 - 50 Hz
CCT / Tone	2700 K
Colour rendering index	90 Ra
C.C. / C.V.	AC
Safety class	1
IP	IP20
Glow wire test	850°
Direct mounting on normally flammable surfaces	Yes
CE	Yes
Driver included	Driver
Dimmable article	Phase cut
Directional	No
Tilting	No
Walk-over	No
Drive-over	No
Cable included	Yes
Cable length	2300 m
Resin potting	No
Type of light emission	Double emission
Net weight	6.395 Kg
Electrostatic discharge protection	No
Surge protection	No

Finishing casing

Material	Die-cast Aluminium
Colour	White
Processing	Powder coating

Finishing diffuser

Material	PC
Colour	Opal white

Pendant Luminaires | 220-240 V | 9 topLED 46 W DC - 49 W AC | CRI 90 | Base
8684

Double emission pendant luminaires for indoor application. The warm white LED light source with a diffused light distribution is composed of 270 topled LEDs with CCT of 2700 K and a CRI 90; the source luminous flux is 5170 lm, with a 112.4 lm/W nominal luminous efficacy.

The device body is made of die-cast aluminium and features a white finish, processed by means of powder coating; the diffuser is made of PC. The ingress protection degree is IP20; the total weight is of 6.395 kg.

The total absorbed power is 49 W The power supply cable is included and features a 2300 m length.

The device features protection class I and can be ceiling-mounted.

Compliant with the EN 60598-1 standard and its specific provisions.

Energy efficiency class


This product contains 9 light sources of energy efficiency class F.

Illuminotechnical Features


Light Output Ratio (LOR)	71 %
Source lumens	5170 lm
Delivered lumens	3687 lm
Consumption	49 W
Luminaire efficacy	75 lm/W
Colour temperature	2700 K
Standard Deviation of Colour Matching	3 Step MacAdam
Colour rendering index	90 Ra
Junction temperature (lighting fixture)	80
Standard Operating Ambient Temperature	25°C

LED Life / Failure Ratio

L70 B20 C0 72500h

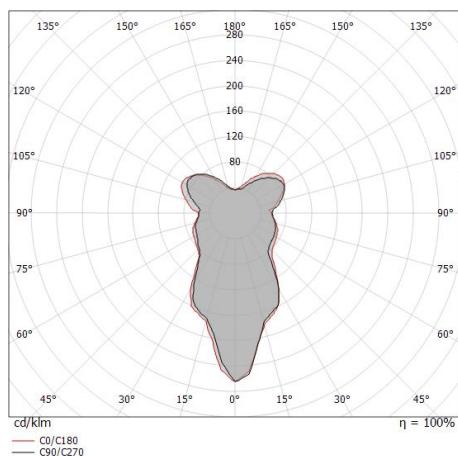


Honey | Pendant Luminaires | Accessories
8684



Dimmer - Phase cut (Max 100W) - Essential for dimming the lamp
220-240V

Code

KIT0026



Dimmer - Phase cut CASAMBI - Essential for dimming the lamp with Casambi
Radio-frequenza, 85-240V

Code

KIT0080