


Pendant Luminaires | 220-240 V  
1 topLED 38 W DC - 44 W AC | CRI 90  
**CZ022CPZMDI**

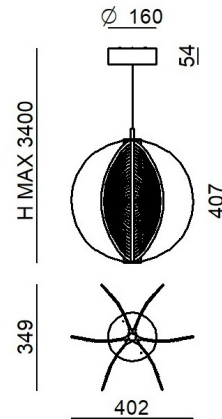

| Technical data                                 |                     |
|--|---------------------|
| Designer                                       | Maurizio Scutellà   |
| Construction year                              | 2026                |
| Type   | Pendant Luminaires  |
| Installation position                          | Ceiling             |
| Installation environment                       | Indoor              |
| Light Source                                   | LED                 |
| Circuit structure                              | topLED              |
| Optics   | Diffused            |
| Light emission direction                       | downward and upward |
| Nominal power                                  | 38 W DC             |
| Total Power                                    | 44 W                |
| Source lumens                                  | 5472 lm             |
| Nominal input voltage                          | 220 - 240 V AC      |
| Input voltage range                            | 220 - 240 V AC      |
| Frequency                                      | 60 - 50 Hz          |
| CCT / Tone                                     | 2700 K              |
| Colour rendering index                         | 90 Ra               |
| C.C. / C.V.                                    | AC                  |
| Safety class                                   | 1                   |
| IP   | IP20                |
| Glow wire test                                 | 850°                |
| Direct mounting on normally flammable surfaces | Yes                 |
| CE   | Yes                 |
| Driver included                                | Driver              |
| Dimmable article                               | DALI-2 - PUSH DIM   |
| Directional                                    | No                  |
| Tilting  | No                  |
| Walk-over                                      | No                  |
| Drive-over                                     | No                  |
| Cable included                                 | Yes                 |
| Cable length                                   | 3 m                 |
| Resin potting                                  | No                  |
| Type of light emission                         | Double emission     |
| Electrostatic discharge protection             | No                  |
| Surge protection                               | No                  |

**Finishing Finishing casing**

|            |                      |
|------------|----------------------|
| Material   | Aluminium            |
| Colour     | Polished dark bronze |
| Processing | Coating              |

**Finishing Finishing diffuser**

|          |                   |
|----------|-------------------|
| Material | Extra clear glass |
| Colour   | Transparent       |

**Finishing Finishing mounting frame**

|            |                      |
|------------|----------------------|
| Material   | Iron                 |
| Colour     | Polished dark bronze |
| Processing | Coating              |

**Cables Electrification+ suspension**

|                  |         |
|------------------|---------|
| Max cable length | 3000 mm |
|------------------|---------|

Pendant Luminaires | 220-240 V | 1 topLED 38 W DC - 44 W AC | CRI 90 | Base CZ022CPZMDI

Double emission pendant luminaires for indoor application. The super warm white LED light source with a diffused light distribution is composed of 720 topLEDs with CCT of 2700 K and a CRI 90; the source luminous flux is 5472 lm, with a 144.0 lm/W nominal luminous efficacy.

The device body is made of aluminium and features a polished dark bronze finish, processed by means of coating; the diffuser is made of extra clear glass; the mounting frame is made of iron, with a polished dark bronze finish, processed by means of coating.

The ingress protection degree is IP20;

The total absorbed power is 44 W The power supply cable is included and features a 3 m length.

The device features protection class I and can be ceiling-mounted.

Compliant with the EN 60598-1 standard and its specific provisions.

**Energy efficiency class**

This product contains a light source of energy efficiency class E.

**Illuminotechnical Features**


|   |                |
|---|----------------|
| Light Output Ratio (LOR)                | 48 %           |
| Source lumens                           | 5472 lm        |
| Delivered lumens                        | 2665 lm        |
| Consumption                             | 44 W           |
| Luminaire efficacy                      | 60 lm/W        |
| Colour temperature                      | 2700 K         |
| Standard Deviation of Colour Matching   | 3 Step MacAdam |
| Colour rendering index                  | 90 Ra          |
| Junction temperature (lighting fixture) | 80             |
| Standard Operating Ambient Temperature  | 25°C           |

**UGR**


|                   |          |
|-------------------|----------|
| UGR axial         | 17.3     |
| UGR transversal   | 17.3     |
| X=4H   Y=8H       | S=0.25H  |
| Reflection factor | 70/50/20 |

**OPTICAL**

|                             |             |
|-----------------------------|-------------|
| C0/C180 optics              | 180°        |
| Light distribution symmetry | Symmetrical |

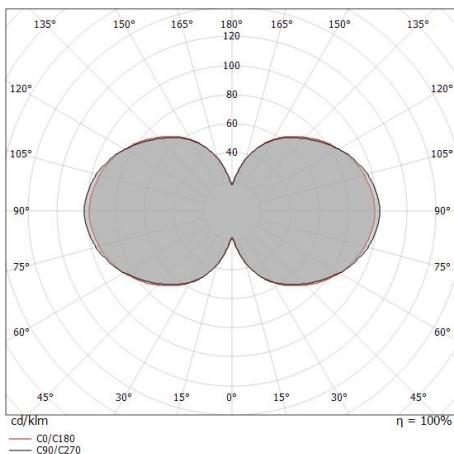

Papylia | Pendant Luminaires | Accessories  
**CZ022CPZMDI**



Dimmer - 0-10V, 1-10V or DALI dimming interface  
Bluetooth, 220-240V

**Code**  
KIT0079