
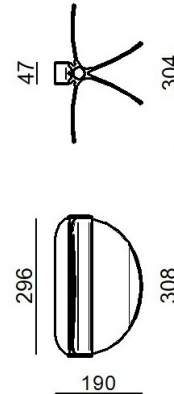


Wall Lights | 198-264 V
 1 topLED 19 W DC - 23 W AC | CRI 90
CZ023CMSMDI



Technical data	
Designer	Maurizio Scutellà
Construction year	2026
Type	Wall Lights
Installation position	Wall lights
Installation environment	Indoor
Light Source	LED
Circuit structure	topLED
Optics	Diffused
Light emission direction	downward and upward
Nominal power	19 W DC
Total Power	23 W
Source lumens	2736 lm
Nominal input voltage	220 - 240 V AC
Input voltage range	198 - 264 V AC
Frequency	50 - 60 Hz
CCT / Tone	2700 K
Colour rendering index	90 Ra
C.C. / C.V.	AC
Safety class	1
IP	IP20
Glow wire test	850°
Direct mounting on normally flammable surfaces	Yes
CE	Yes
Driver included	Driver
Dimmable article	DALI-2 - PUSH DIM
Directional	No
Tilting	No
Walk-over	No
Drive-over	No
Cable included	No
Resin potting	No
Type of light emission	Double emission
Electrostatic discharge protection	No
Surge protection	No

Finishing Finishing casing

Material	Aluminium
Colour	Polished mushroom (R1019)
Processing	Coating

Finishing Finishing diffuser

Material	Extra clear glass
Colour	Transparent

Finishing Finishing mounting frame

Material	metal
Colour	Polished mushroom (R1019)
Processing	Coating

Wall Lights | 198-264 V | 1 topLED 19 W DC - 23 W AC | CRI 90 | Base CZ023CMSMDI

Double emission wall lights for indoor application. The super warm white LED light source with a diffused light distribution is composed of 360 topLEDs with CCT of 2700 K and a CRI 90; the source luminous flux is 2736 lm, with a 144.0 lm/W nominal luminous efficacy.

The device body is made of aluminium and features a polished mushroom (r1019) finish, processed by means of coating; the diffuser is made of extra clear glass; the mounting frame is made of metal, with a polished mushroom (r1019) finish, processed by means of coating.

The ingress protection degree is IP20;

The total absorbed power is 23 W

The device features protection class I and can be wall lights-mounted.

Compliant with the EN 60598-1 standard and its specific provisions.

Energy efficiency class


This product contains a light source of energy efficiency class E.

Illuminotechnical Features


Light Output Ratio (LOR)	50 %
Source lumens	2736 lm
Delivered lumens	1382 lm
Consumption	23 W
Luminaire efficacy	60 lm/W
Colour temperature	2700 K
Standard Deviation of Colour Matching	3 Step MacAdam
Colour rendering index	90 Ra
Junction temperature (lighting fixture)	80
Standard Operating Ambient Temperature	25°C

OPTICAL

C0/C180 optics	180°
Light distribution symmetry	Symmetrical

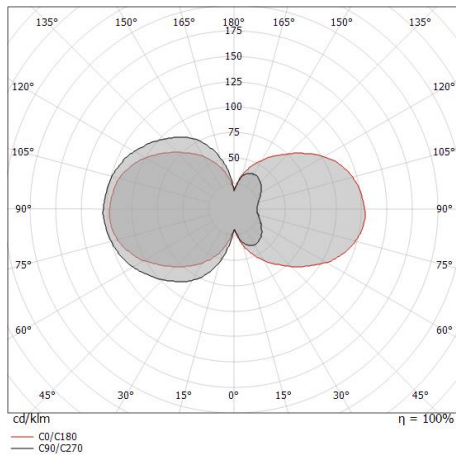

Papylia | Wall Lights | Accessories
CZ023CMSMDI



Dimmer - 0-10V, 1-10V or DALI dimming interface
Bluetooth, 220-240V

Code
KIT0079