
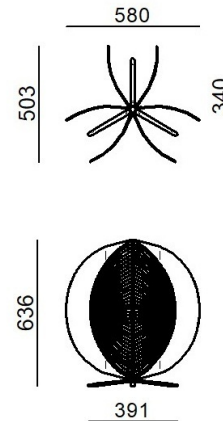


Floor Lamp | 100-240 V
 1 topLED 47 W DC - 55 W AC | CRI 90
CZ027FPZMDI



Technical data	
Designer	Maurizio Scutellà
Construction year	2026
Type	Floor Lamp
Installation position	Floor
Installation environment	Indoor
Light Source	LED
Circuit structure	topLED
Optics	Diffused
Light emission direction	downward and upward
Nominal power	47 W DC
Total Power	55 W
Source lumens	6768 lm
Nominal input voltage	220 - 240 V AC
Input voltage range	100 - 240 V AC
Frequency	50 - 60 Hz
CCT / Tone	2700 K
Colour rendering index	90 Ra
C.C. / C.V.	AC
Safety class	2
IP	IP20
Glow wire test	850°
Direct mounting on normally flammable surfaces	Yes
CE	Yes
Driver included	Driver
Dimmable article	PUSH DIM
Directional	No
Tilting	No
Walk-over	No
Drive-over	No
Cable included	Yes
Electric socket	Type C
Cable length	4 m
Resin potting	No
Type of light emission	Double emission
Electrostatic discharge protection	No
Surge protection	No

Finishing Finishing casing	
Material	Aluminium
Colour	Polished dark bronze
Processing	Coating

Finishing Finishing diffuser	
Material	Extra clear glass
Colour	Transparent

Floor Lamp | 100-240 V | 1 topLED 47 W DC - 55 W AC | CRI 90 | Base CZ027FPZMDI

Double emission floor lamp for indoor application. The super warm white LED light source with a diffused light distribution is composed of 1140 topLEDs with CCT of 2700 K and a CRI 90; the source luminous flux is 6768 lm, with a 144.0 lm/W nominal luminous efficacy.

The device body is made of aluminium and features a polished dark bronze finish, processed by means of coating; the diffuser is made of extra clear glass.

The ingress protection degree is IP20;

The total absorbed power is 55 W The power supply cable is included and features a 4 m length.

The device features protection class II and can be floor-mounted.

Compliant with the EN 60598-1 standard and its specific provisions.

Energy efficiency class

This product contains a light source of energy efficiency class E.

Illuminotechnical Features

Light Output Ratio (LOR)	48 %
Source lumens	6768 lm
Delivered lumens	3302 lm
Consumption	55 W
Luminaire efficacy	60 lm/W
Colour temperature	2700 K
Standard Deviation of Colour Matching	3 Step MacAdam
Colour rendering index	90 Ra
Junction temperature (lighting fixture)	80
Standard Operating Ambient Temperature	25°C

UGR

UGR axial	15.4
UGR transversal	15.4
X=4H Y=8H	S=0.25H
Reflection factor	70/50/20

OPTICAL

C0/C180 optics	180°
Light distribution symmetry	Symmetrical

