


Systems | 220-240 V | 1x14W E27  
**CZ146DVBM DI**

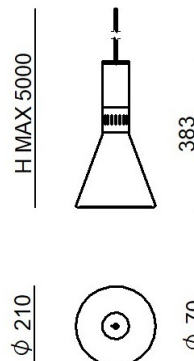

Technical data	
Designer	Stilnovo
Construction year	2026
Type	Systems
Installation position	Ceiling
Installation environment	Indoor
Bulb included	Yes
Lamp cap	1 x E27
Light emission direction	downward and upward
Frequency	50-60 Hz
Optics	Diffused
Safety class	2
IP	IP20
Glow wire test	850°
Direct mounting on normally flammable surfaces	Yes
CE	Yes
Dimmable article	Phase cut
Directional	No
Tilting	No
Walk-over	No
Drive-over	No
Cable included	Yes
Cable length	5 m
Resin potting	No
Net weight	2.391 Kg

**Finishing Finishing casing**

Material	Iron
Colour	Satin black nickel
Processing	Electroplating

**Finishing Finishing diffuser**

Material	Glass
Colour	white

**Cables Electrification+suspension**

Max cable length	5000 mm
------------------	---------

Systems | 220-240 V | 1x14W E27 | Base  
**CZ146DVBM DI**

Double emission systems for indoor application. LED lamplamp included, lamp cap E27 1x14W.

The device body is made of iron and features a satin black nickel finish, processed by means of electroplating; the diffuser is made of glass.

The ingress protection degree is IP20; the total weight is of 2.391 kg.

The power supply cable is included and features a 5 m length.

The device features protection class II and can be ceiling-mounted.

Compliant with the EN 60598-1 standard and its specific provisions.

**Energy efficiency class**

This product contains a light source of energy efficiency class D.

**Illuminotechnical Features**


Light Output Ratio (LOR)	100 %
Delivered lumens	1164 lm
Consumption	14 W
Luminaire efficacy	83 lm/W
Colour temperature	2700 K
Colour rendering index	80 Ra
Source lumens	1 x 1900 lm
Standard Operating Ambient Temperature	25°C

**UGR**

UGR axial	15.5
UGR transversal	15.8
X=4H   Y=8H	S=0.25H
Reflection factor	70/50/20

**OPTICAL**


C0/C180 optics	180°
Light distribution simmetry	Symmetrical

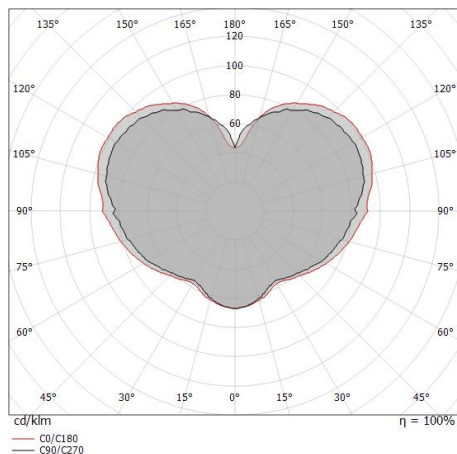

Cono | Systems | Accessories  
**CZ146DVBMDI**


	<p>Ceiling rose Driver included: No.</p>	<p><b>Code</b> <u>C-F300058</u></p>
	<p>Ceiling rose Driver included: No. Material:Iron, colour:Text black (R9005), processing:Coating.</p>	<p><b>Code</b> <u>C-F300059</u></p>
	<p>Ceiling rose Driver included: No.</p>	<p><b>Code</b> <u>C-F300060</u></p>
	<p>Ceiling rose Driver included: No. Material:Iron, colour:Text black (R9005), processing:Coating.</p>	<p><b>Code</b> <u>C-F300061</u></p>
	<p>Ceiling rose Driver included: No.</p>	<p><b>Code</b> <u>C-F300062</u></p>
	<p>Ceiling rose Driver included: No. Material:Iron, colour:Text black (R9005), processing:Coating.</p>	<p><b>Code</b> <u>C-F300063</u></p>
	<p>Ceiling rose Driver included: No.</p>	<p><b>Code</b> <u>C-F300064</u></p>
	<p>Ceiling rose Driver included: No. Material:Iron, colour:Text black (R9005), processing:Coating.</p>	<p><b>Code</b> <u>C-F300065</u></p>

Cono | Systems | Accessories  
**CZ146DVBMDI**




Cable cover  
Material:Pom-C, colour:Black.

**Code**  
C-F30077



Dimmer - Phase cut CASAMBI - Essential for dimming the lamp with Casambi  
Radio-frequenza, 85-240V

**Code**  
KIT0080



Dimmer - Phase cut (Max 100W) - Essential for dimming the lamp  
220-240V

**Code**  
KIT0026