


Pendant Luminaires | 220-240 V | 5x14W E27
CZ149DWWMDI

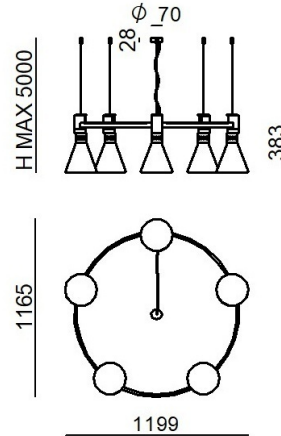

Technical data	
Designer	Stilnovo
Construction year	2026
Type	Pendant Luminaires
Installation position	Ceiling
Installation environment	Indoor
Bulb included	Yes
Lamp cap	5 x E27
Light emission direction	downward
Frequency	50-60 Hz
Optics	Diffused
Safety class	1
IP	IP20
Glow wire test	850°
Direct mounting on normally flammable surfaces	Yes
CE	Yes
Dimmable article	Phase cut
Directional	No
Tilting	No
Walk-over	No
Drive-over	No
Cable included	Yes
Cable length	6 m
Resin potting	No

Finishing Finishing diffuser	
Material	Glass
Colour	white

Cables Pendant Luminaires	
Max cable length	6000 mm

Pendant Luminaires | 220-240 V | 5x14W E27 | Base
CZ149DWWMDI

Double emission pendant luminaires for indoor application. LED lamp included, lamp cap E27 5x14W.

; the diffuser is made of glass.

The ingress protection degree is IP20;

The power supply cable is included and features a 6 m length.

The device features protection class I and can be ceiling-mounted.

Compliant with the EN 60598-1 standard and its specific provisions.

Energy efficiency class

This product contains 5 light sources of energy efficiency class D.

Illuminotechnical Features


Light Output Ratio (LOR)	100 %
Delivered lumens	5818 lm
Consumption	70 W
Luminaire efficacy	83 lm/W
Colour temperature	2700 K
Colour rendering index	80 Ra
Source lumens	5 x 1900 lm
Standard Operating Ambient Temperature	25°C

UGR


UGR axial	13.7
UGR transversal	14
X=4H Y=8H	S=0.25H
Reflection factor	70/50/20

OPTICAL

C0/C180 optics	180°
Light distribution symmetry	Symmetrical

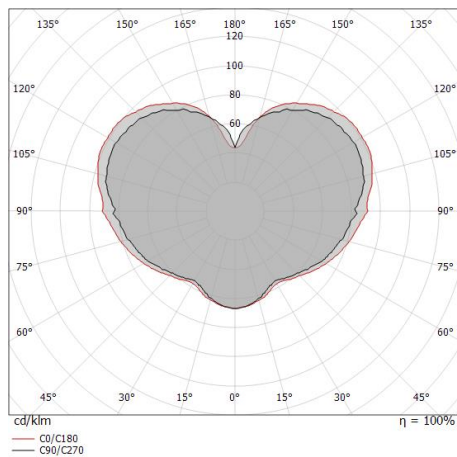


Cono | Pendant Luminaires | Accessories
CZ149DWWMDI



Dimmer - Phase cut CASAMBI - Essential for dimming the lamp with Casambi
 Radio-frequenza, 85-240V

Code
KIT0080



Dimmer - Phase cut (Max 100W) - Essential for dimming the lamp
 220-240V

Code
KIT0026