



MAGNUS S2 PENDANT

FP715K/WE/OP


FRONT VIEW

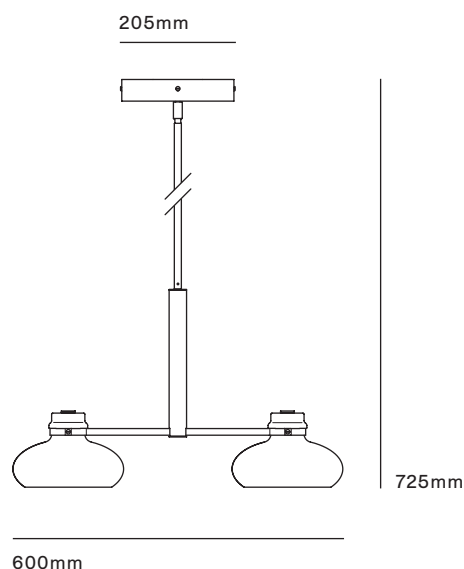

SIDE VIEW

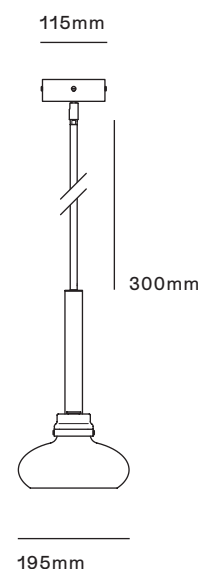

TOP VIEW



BULB CAP	G4
MAX WATTAGE	6W (LED) X 2
VOLTAGE	230V (AC)
BULB TYPE	CAPSULE
IP RATING	IP20
MATERIALS	GLASS, STEEL, BRASS
AVAILABLE FINISH	OPAL GLASS (SHADE) BLACK BRONZE
ADDITIONS	SUSPENSION POLES; 30CM AND 55CM
LAMP SUPPLIED	G4 LED BULBS, 2700K
CERTIFICATIONS	CE UK

- Fitting is dimmable and is supplied with a TRIAC dimming leading edge driver.
- Dimming performance may vary between manufacturers, check minimum load and compatibility against dimmer specification.
- This product is available for specific markets.
- Features an integral 12V DC driver for connection to the main (house) supply. Lamps (bulbs) must be compatible with a 12V DC input.

ORIGINAL BTC

MAGNUS


DROP LENGTH GUIDE

Additional suspension poles can be added to increase the drop length of the Magnus pendants.


The additional suspension poles come in two standard lengths; 30cm and 55cm.

The diagrams below show two standard ceiling heights, 2.7 meters and 2.4 meters.


Supplied 30cm tube - 725mm overall drop

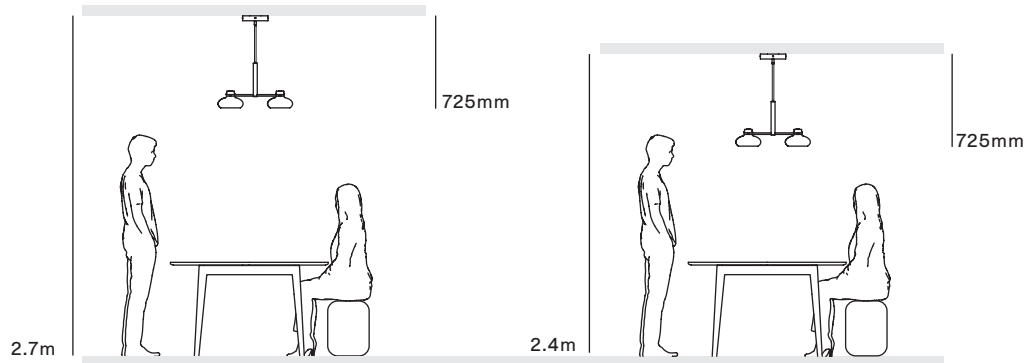

Supplied 30cm tube + add-on 55cm tube- 1275mm overall drop

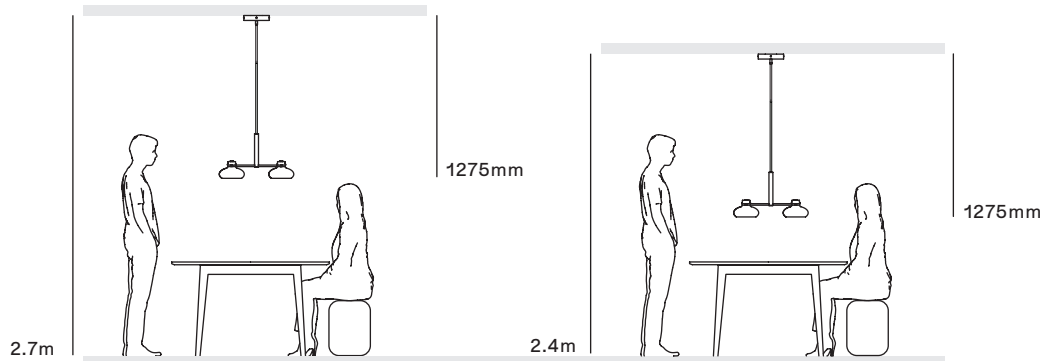

Supplied 30cm tube + add-on 30cm tube - 1025mm overall drop

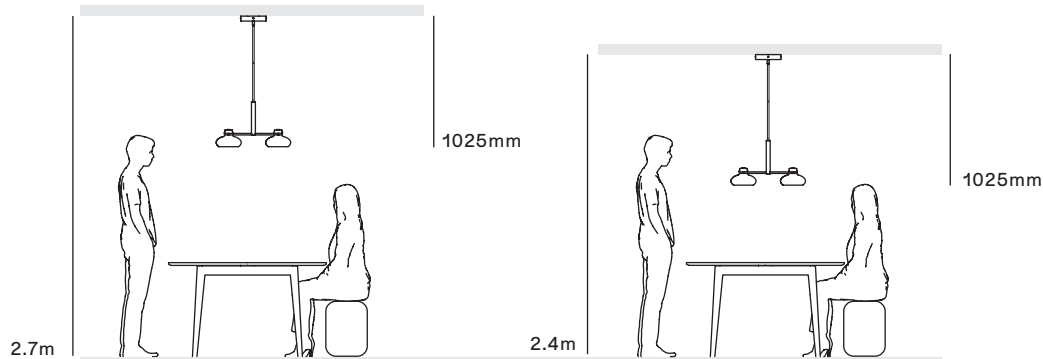

ORIGINAL BTC