



# MAGNUS S3 PENDANT

FP716K/WE/OP


FRONT VIEW

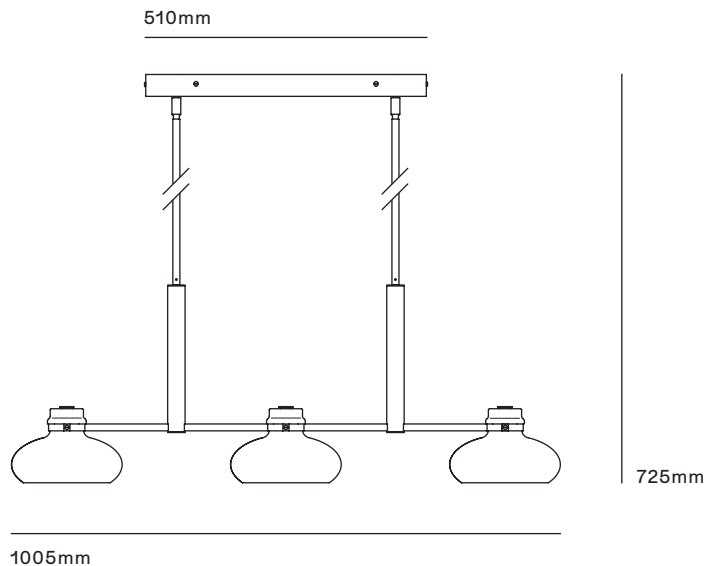

SIDE VIEW

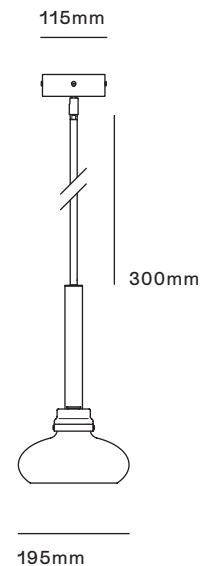

TOP VIEW



BULB CAP	G4
MAX WATTAGE	4W (LED) X 3
VOLTAGE	230V (AC)
BULB TYPE	CAPSULE
IP RATING	IP20
MATERIALS	GLASS, STEEL, BRASS
AVAILABLE FINISH	OPAL GLASS (SHADE) BLACK BRONZE
ADDITIONS	SUSPENSION POLES; 30CM AND 55CM
LAMP SUPPLIED	G4 LED BULBS, 2700K
CERTIFICATIONS	CE UK

- Fitting is dimmable and is supplied with a TRIAC dimming leading edge driver.
- Dimming performance may vary between manufacturers, check minimum load and compatibility against dimmer specification.
- This product is available for specific markets.
- Features an integral 12V DC driver for connection to the main (house) supply. Lamps (bulbs) must be compatible with a 12V DC input.

**ORIGINAL BTC**

# MAGNUS


## DROP LENGTH GUIDE

Additional suspension poles can be added to increase the drop length of the Magnus pendants.


The additional suspension poles come in two standard lengths; 30cm and 55cm.

The diagrams below show two standard ceiling heights, 2.7 meters and 2.4 meters.


Supplied 30cm tube - 725mm overall drop

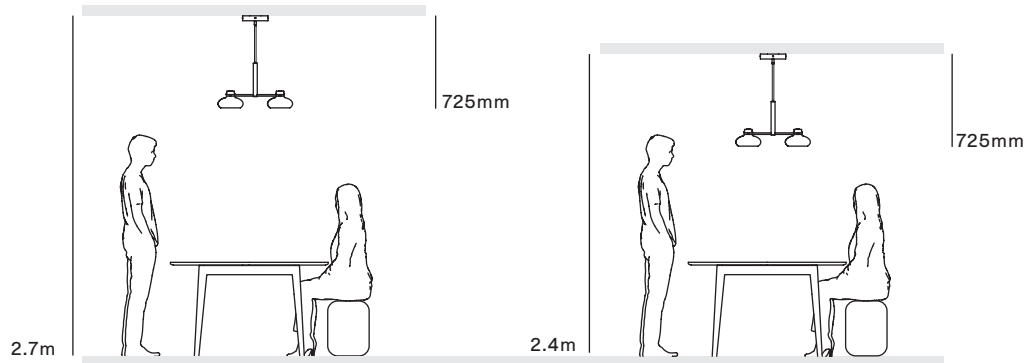

Supplied 30cm tube + add-on 55cm tube- 1275mm overall drop

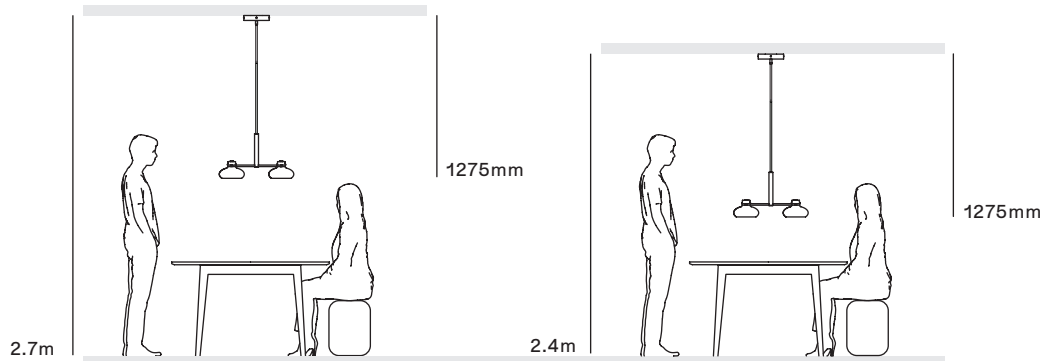

Supplied 30cm tube + add-on 30cm tube - 1025mm overall drop

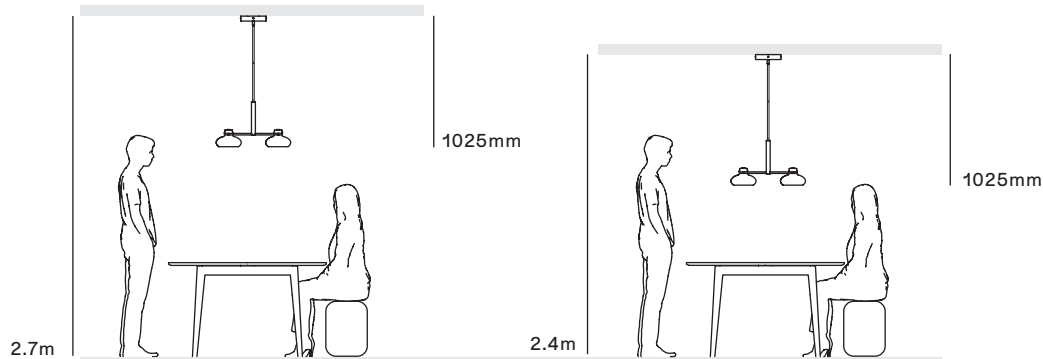

ORIGINAL BTC