

Specifications

PRODUCT CODE:	DP7212/27	IP RATING:	IP44
MAX WATTAGE:	2.5W	MATERIAL(S):	BRASS, GLASS
VOLTAGE:	12V (DC)	AVAILABLE FINISH:	WEATHERED OR POLISHED BRASS/CHOME PLATED
BULB TYPE:	LED TUBE (SUPPLIED)		

Supplied with integral LED and driver (for remote installation up to 10 meters from the fitting*) Fitting is dimmable and is supplied with a TRIAC dimming leading edge driver **

Warm white tone LED (2700K)


IMPORTANT:

LOW VOLTAGE LED FITTING CONNECTION TO REMOTE DRIVER (SUPPLIED) REQUIRED FOR MAINS INSTALLATION

^{*}Assuming minimum cable gauge is 1.5mm (16AWG)

^{**}Dimming performance may vary between manufacturers, check minimum load and compatability against dimmer specification.



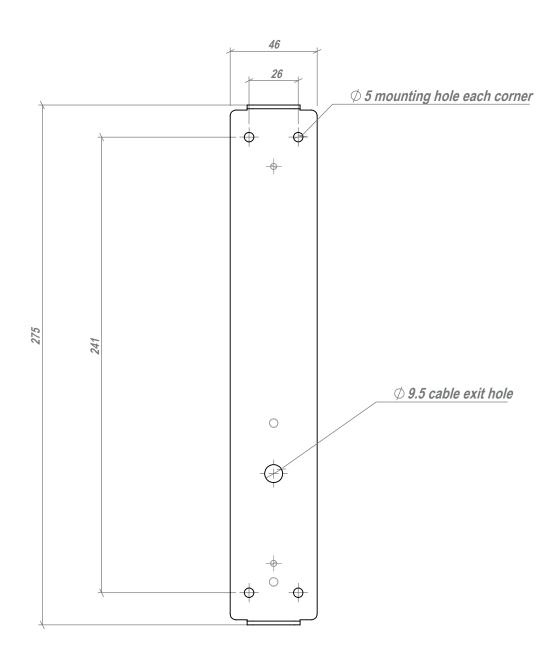

Backplates can be rotated 180 degrees- to allow cable exit to be positioned at top if required.

Stated dimensions are for reference purposes only. Due to manufacturing tolerances, the actual dimensions of each product may differ to those stated.